

PureChlor Compact




Chlorine Dioxide - A Powerful Disinfectant

Chlorine Dioxide is ideal for the treatment of onsite water. This system will continuously dose the break tank with trace levels of chlorine dioxide to control the feed levels of bacteria.

- Reduces bacteria levels quickly and effectively over a wide range of pH
- Efficient low chemical usage
- Robust, built on proven technology
- Compact system 1120mm - 1320mm (w)* x 520mm (d) x 1750mm (h)
- Easy to install
- Fully automated proportional dosing
- Simple to maintain
- PLC Control including chemical flow monitors
- Treats different water supplies through multiple POU facility.

*Options available: Internal or external storage tanks

Flow Diagram

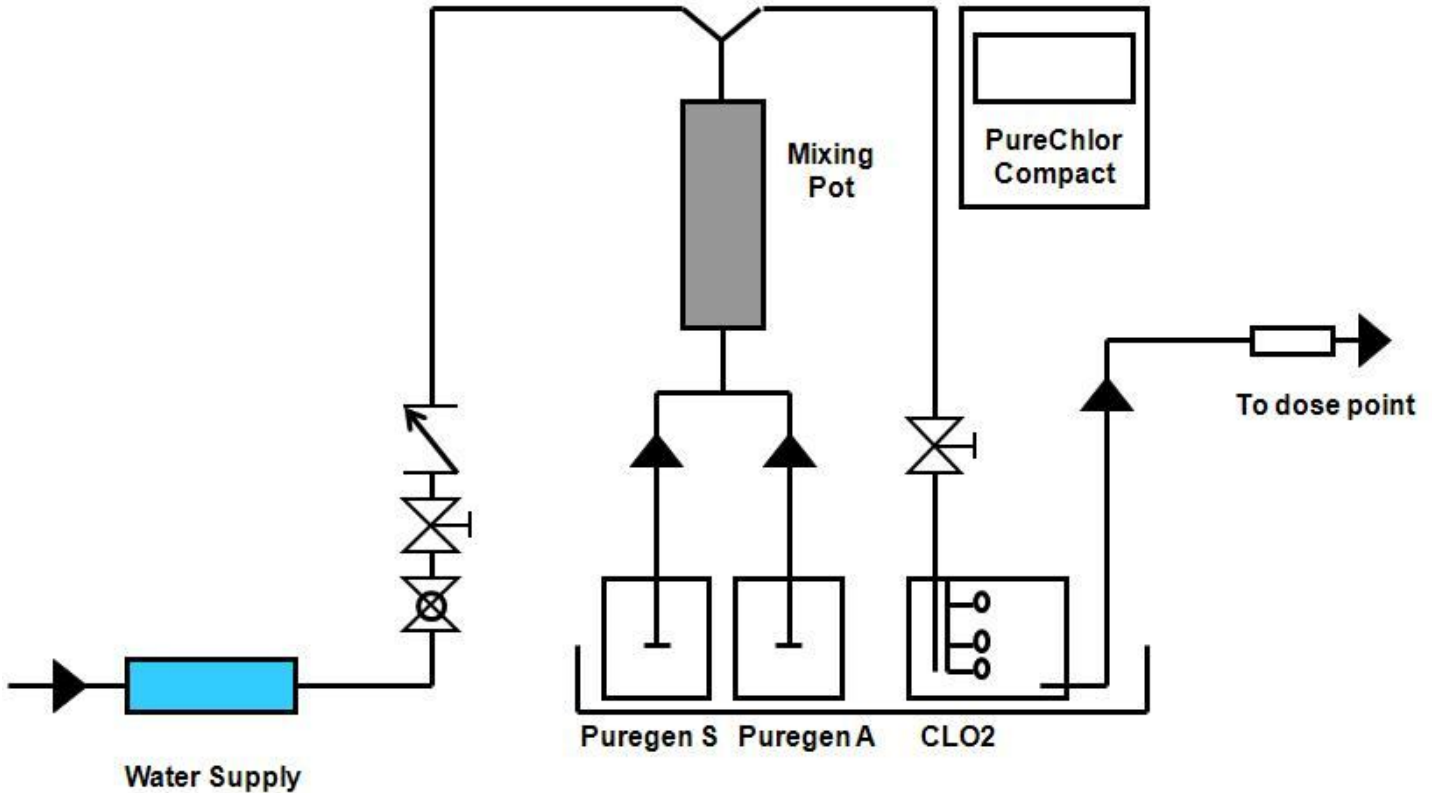

Technical Specification

Capacity	0.5m ³ / hr – 200m ³ /hr @ 1ppm ClO ₂
Power Requirements	240 Volts 13 or 32 AMP switch fuse (depending on chosen options)
Dimensions	120 - 1320mm (w) x 520mm (d) x 1750mm (H)
Water Supply	2 - 6 bar Ideally softened or RO treated but can treat towns mains supply



UK Office:

Envirogen Water Technologies
Charwell House, Cheddar Business Park
Wedmore Road
Somerset, BS27 3EB
Tel: +44 (0) 1934 741782
E: info@envirogen.com
www.envirogenwater.com



Italian Office:

Fluxa Filtri S.p.A
Viale De GASPERI,88/B
20017, Mazzo di Rho
Milano
Tel: +39 (0)2 93959.1
E: info@fluxafiltri.com
www.fluxafiltri.com



USA Office:

Envirogen Technologies
Two Kingwood Place
700 Rockmead Dr. Suite 105
Kingwood, TX 77339
Tel: +1 877.312.8950
E: info@envirogen.com
www.envirogen.com

