

Deltapor MBA

Deltapor MBA are a range of absolute rated, graded density filter elements, manufactured from melt blown polypropylene microfibrils layered onto a resilient centre core. The construction consists of numerous, distinctive filter zones with coarser outer layers acting as pre-filters for the tighter, absolute rated central zone, this removal profile produces an element possessing high voids volume, which benefit the user through high flow rates, low pressure loss, high dirt holding capacity and long life.




The thermally bonded polypropylene media also eliminates fibre migration and resists the tendency to unload during service. The range offers extremely wide chemical compatibility and temperature resistance up to 80°C.

Recommended changeout $\Delta P = 2$ bar.

Maximum differential pressure: 4.2 bar @ 20°C; 2.1 bar @ 60°C ; 1.2 bar @ 80°C.

Pressure Loss / Flow rate for 10" Deltapor MBA

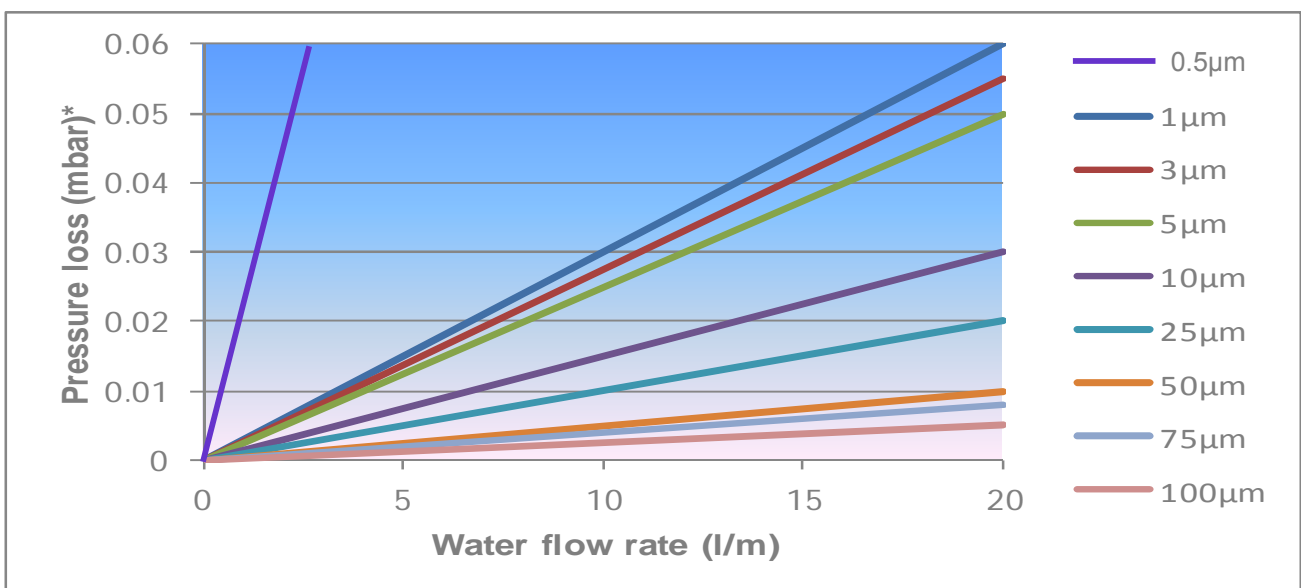

* To correct for viscosity, multiply pressure loss by viscosity in centipoises

Construction Material

Deltapor MBA is constructed from FDA approved media and contains no wetting agents, solvents, binders, additives, leachables or extractables giving a cartridge which meets the requirements of USP-XXIII Class VI.

They can be autoclaved for 30 minutes at 121°C making the range suitable for food, biological and pharmaceutical applications.

Benefits

Deltapor MBA also exhibit fast rinse up to 18 megaohms in electronics duties.

Deltapor MBA are available in pore sizes from 0.5 to 100 microns 99.9% removal efficiency. Elements are supplied in lengths up to 40" with end configurations to suit most industry standard housings.

Ordering Guide

Name	Micron Rating	Nominal Length	End Cap Type	Seal Type	Special
Deltapor MBA	0.5	247mm (9")	03	E - EDPM	
	1.0	251mm (10")	04 - DOE	S - Silicone	
	3.0	254mm (11")	07	N - Nitrile	
	5.0	500mm (19")	08	V - Vitron	
	10	508mm (20")			
	25	750mm (29")			
	50	762mm (30")			
	75	1000mm (39")			
	100	1016mm (40")			

Standard element is 63mm bar
Caged Version can be supplied in Polypropylene - 68mm

V1-08/14



UK Office:

Envirogen Water Technologies
Charwell House
Cheddar Business park
Wedmore Road
Somerset, BS27 3Eb
Tel: +44 (0) 1934 741782
E: info@envirogengroup.com
www.envirogenwater.com



Italian Office:

Fluxa Filtri S.p.A
Viale De GASPERI,88/B
20017
Mazzo di Rho
Milano
Tel: +39 (0)2 93959.1
E: info@fluxafiltri.com
www.fluxafiltri.com



USA Office:

Envirogen Technologies
Two Kingwood Place
700 Rockmead Dr. Suite 105
Kingwood, TX 77339
Tel: +1 877.312.8950
E: info@envirogen.com
www.envirogen.com