

Fluxflo Range of Filter Bags

Main Features

- Available in particle removal ratings from 1 to 1000 microns
- Available in 4 sizes to fit the housings of most filter manufacturers
- Available in 7 types of filtering media
- Available in 6 different material: polypropylene, polyester, nylon, wool, Nomex® and PTFE.
- Three different types of sealing:
 - Sewn with metalling ring for standard applications
 - Thermowelded with molded ring to guarantee
 - High efficiency sealing
 - String for applications without filter housings



The range includes:

- "Silicon-free felt filter bags
- Monofilament mesh filter bags
- Multifilament mesh filter bags
- High dirty capacity "extended life" felt filter bags
- High efficiency microfibrils filter bags
- Filter bags certified for application in Pharmaceutical and Food & Beverage industries
- Absolute polypropylene bags

Applications


Paints, enamels, solvents	Resins
Colloids removal	Inks
Magnetic coatings	Detergents
Intermediate chemicals	Sugar solutions
Food & Beverage filtration	Water process filtration
Oil removal from cataphoresis treatments	

How the Bags Work


The bag is fitted in the restrainer. The sealing between the bag and restrainer is made by the bag hold-down ring. During the bags working life the pressure drop will grow up. The differential pressure between bag upstream and downstream is supported by the restrainer where the bag is fitted. The fluid flows through the bag from inside to outside. Bag filtration is defined as a surface one, even if for some products it can be defined both as surface and depth filtration.

Flow Rate and Viscosity

HIGH EFFICIENCY AND FELT BAGS

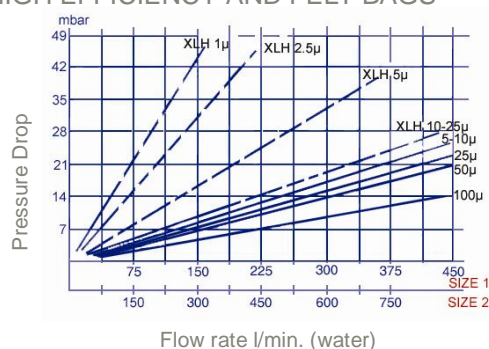

MONOFILAMENT BAGS CORRECTION FACTORS

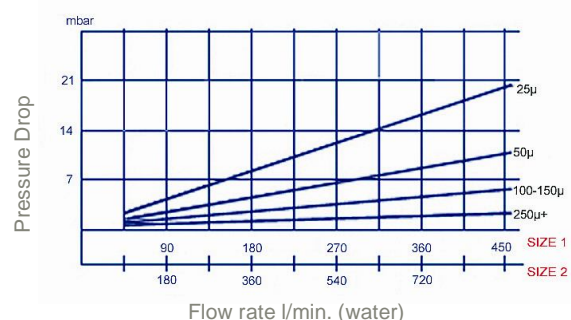


Filter Housings

Single and multi bags housings manufactured by Flux Filtri can fit all filter bags.

- Housings series "FH" (see FH Bag Leaflet)
- Housings series "SC" (see SC Leaflet)

BAGS SIZE	Ø D cm	L cm
05	10.4	23
09	10.4	38
1	18	42
2	18	81



Viscosity cps	10.000	8.000	6.000	4.000	2.000	1.800	1.500	800	600	400	200	1
Correction factors	0.021	0.026	0.035	0.05	0.08	0.11	0.16	0.17	0.25	0.35	0.85	1

Material Features

FILTER BAG MATERIALS	MAX. WORKING TEMPERATURE °C	APPLICATIONS							
		AROMATIC SOLVENTS	ALIPHATIC SOLVENTS	WATER SOLUTIONS	ACIDS	STRONG ACIDS	ALKALI	STRONG ALKALI	VEGETABLE AND ANIMAL OILS
POLYPROPYLENE	90		•	•	•	•	•	•	•
POLYESTER	150	•	•	•	•	•	•	•	•
NYLON	135	•	•	•			•	•	
WOOL	110	•	•	•	•				•
NOMEX®	220	•	•	•	•		•	•	•
PTFE	260			•	•	•	•		•

Ordering Guide

G	1	P	25	PO	<p>Type and sealing material</p> <p>- = Galvanised steel ring</p> <p>P = Polypropylene ring</p> <p>S = Stainlees Steel 316 ring</p> <p>PO = Molded in polypropylene</p> <p>SE = Molded with material compatible with filter media</p>											
<p>Filtration rating in micron</p> <p>Felt = 1-5-10-25-50-75-100-150-200</p> <p>Mesh = 25-50-80-100-125-150-200-250-400-600-800-1000</p> <p>*Extended life" Felt = 1-5-10-25-50-100</p> <p>High efficiency Microfibre (> 95%)= 1-5-10-25</p> <p>Absolute microfibre polypropylene (99,98%) = 0.2-0.4-0.6-0.8-1-3-5</p>																
<p>Bag Material</p> <p>P = Polypropylene Felt NM = Mofilament Nylon mesh PXLH = "Extended life" Polypropylene</p> <p>PE = Polyester Felt PRM = Monofilament Polypropylene mesh PEXLH = "Extended life" Polyester</p> <p>N = Nylon Felt PEM = Monofilament Polyester mesh PMF = Polypropylene microfibre (efficiency > 95%)</p> <p>W = Wool PEMU = Multi mesh Polyester PEMF = Polyester microfibre (efficiency > 95%)</p> <p>NX = Nomex® OA = Oil adsorber</p> <p>T = PTFE</p>																
<p>Bag size</p> <table border="0"> <tr> <td>0.5</td> <td>Surface area</td> <td>0.09 m²</td> </tr> <tr> <td>0.9</td> <td></td> <td>0.18 m²</td> </tr> <tr> <td>1</td> <td></td> <td>0.26 m²</td> </tr> <tr> <td>2</td> <td></td> <td>0.49 m²</td> </tr> </table>					0.5	Surface area	0.09 m ²	0.9		0.18 m ²	1		0.26 m ²	2		0.49 m ²
0.5	Surface area	0.09 m ²														
0.9		0.18 m ²														
1		0.26 m ²														
2		0.49 m ²														
<p>Sealing type</p> <p>G = ring</p> <p>L = without ring</p>																

V1-08/14



UK Office:

Envirogen Water Technologies
Charwell House
Cheddar Business park
Wedmore Road
Somerset, BS27 3Eb
Tel: +44 (0) 1934 741782
E: info@envirogengroup.com
www.envirogenwater.com



Italian Office:

Fluxa Filtri S.p.A
Viale De GASPERI,88/B
20017
Mazzo di Rho
Milano
Tel: +39 (0)2 93959.1
E: info@fluxafiltri.com
www.fluxafiltri.com



USA Office:

Envirogen Technologies
Two Kingwood Place
700 Rockmead Dr. Suite 105
Kingwood, TX 77339
Tel: +1 877.312.8950
E: info@envirogen.com
www.envirogen.com